


HOOK AND LAY-ON TEE CEILING SYSTEM


The hook and lay-on ceiling system is the ultimate solution for its visual and functional adaptability. Its ease of disassembly makes it the first choice of system if there is a need to access ceiling plenum frequently. It is also the most economical ceiling system with easy installation.



PROPERTIES

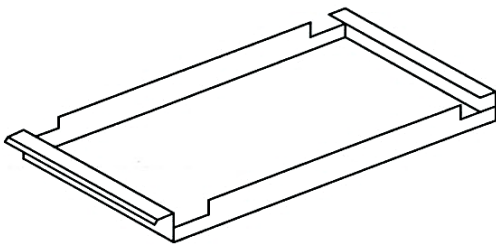

Sample of a 600mm x 300mm panel

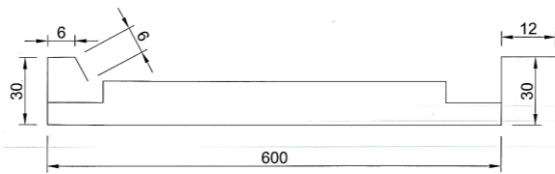

Measurements of the panel

Technical Specifications

Material:	Aluminium
Thickness:	0.7mm/1.0mm
Size:	300mm x 600mm 600mm x 600mm Other custom sizes
Disassembly:	Fully demountable without any tools or with simple tools
Edges:	Sharp

Product Features



Suspension Specifications

Consists of L-angle, Z-profile, hanging rod

Colour Selection



Pearl White




Metallic Silver




Custom

Perforation Patterns

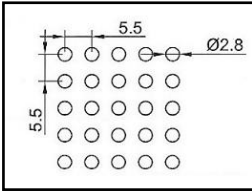



Pattern #28
Open area 20%
Centres 5.5 Straight
Diameter 2.8mm

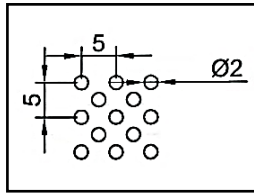


Pattern #20
Open area 22%
Centres 5 Staggered
Diameter 2.0mm

Perforation patterns improve acoustical performance and aesthetic effects. Soundtex non-woven tissue is glued onto the back of the panel for good acoustical performance. For an even greater acoustical performance, mineral wool can be placed on top of Soundtex.


Non-perforated option is also available. Other perforation patterns are available upon request.

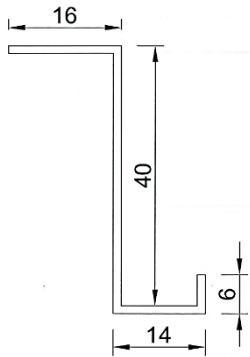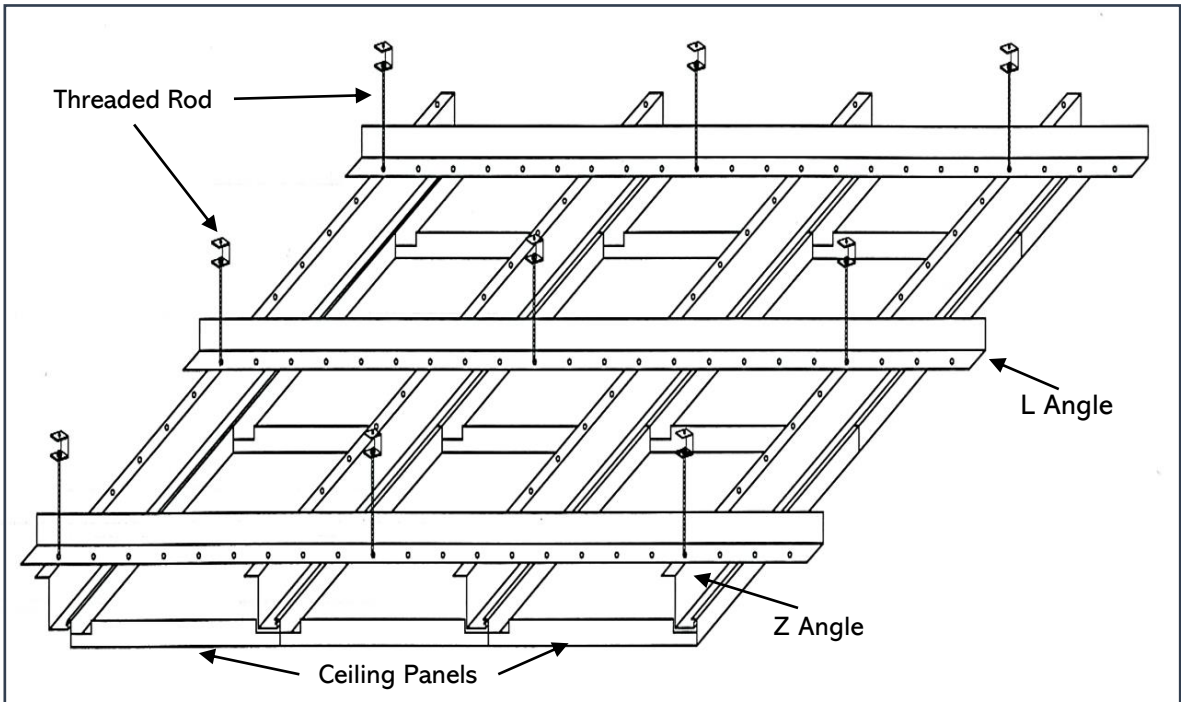

Measurements of the Z-profile



Measurements of the L-angle

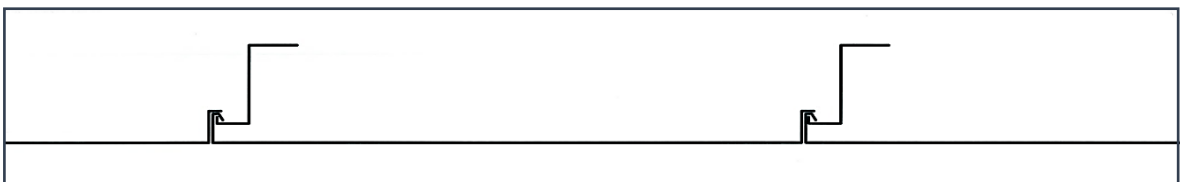

Sample of how the panels are hooked and lay on the Z-profile